

680ES-PG10

Built to provide a combination of performance and portability for cutting in-ground utility pipe, the 680ES-PG petrol powered utility chain saw with PowerGrit® chain will change the way you cut pipe. This affordably priced petrol powered saw, allows you to cut up to 25 cm deep from one side into ductile iron, cast iron, PVC, HDPE, Insituform lining and even Asbestos*concrete pipe, and is also designed to run the full line of MAX series chains. With a quick switch of guidebar, chain and drive sprocket, you have the ability to use this saw in masonry, stone, and even reinforced concrete. Making it the most cost effective, versatile tool in your arsenal.

680ES PRODUCT SPECIFICATIONS



Engine Type	2-stroke, Air Cooled
Displacement	76.5 cc (4.7 cu-in)
Horsepower	3.7 kW (5 hp) @ 9,500 rpm
Torque	4.1 Nm (36.3 in-lbs) @ 6,500 rpm
Engine Speed	11500 +/- 500 rpm (max) 2,800 - 3,200 rpm (idle)
Chain Speed at Maximum Power	34.5 m/s (6800 ft/min)
Weight	9.5 kg (21 lbs) powerhead only
Powerhead Dimensions	46 cm (18 in) length, 29 cm(11.5 in) height 25 cm (10 in) width
Starter	Dust and water resistant
Ignition	Special water resistant electronic ignition
Fuel ratio	4% (25:1) petrol-to-oil
Fuel Capacity	0.88 liter(0.23 gallon)
Water Supply Requirement	Minimum 1.5 bar (20 psi)
Water Flow Requirement	Minimum: 4 lpm (1 gpm)
Guaranteed Sound Power Level, L_{wa} (1)	117 dB(A) ($K_{wa} = 3.0$ dB(A))
Equivalent Sound Pressure at the Operator's Ear, L_{pA} (1)	101.0 dB(A) ($K = 2.0$ dB(A))
Vibration, $a_{hv,eq}$ Concrete Cutting (2)	7.2 m/s ² ($K=1.0$ m/s ²) Front Handle 8.5 m/s ² ($K=1.0$ m/s ²) Rear Handle

(1) Measured in accordance with ANSI S12.51-2012/ISO3741:2010

(2) Measured in accordance with ISO5349-1:2001 and IS 22867:2011

* Asbestos is a hazardous material, known to cause serious respiratory diseases. Cutting into asbestos can release asbestos fibers into the air. Always research and follow the correct safety procedures, including applicable national and state or provisional occupational health and safety regulations, and protect yourself and those around you from asbestos-related disease. Always arrange for the material to be removed safely by a qualified person. ICS is not responsible for exposure to asbestos caused by use of this product.



ICS, BLOUNT S.A. | Rue Emile Francqui 5, 1435 Mont-Saint-Guibert, Belgium | T +32 10 301 251 • F +32 10 301 256

© Copyright 2015 ICS, Blount Inc. Privacy statement specifications subject to change without notice.

Pricing and specifications subject to change without notice. All rights reserved. ICS, WallWalker, SpeedHook, SealPRO, FORCE4 and PowerGrit are registered trademarks of ICS. The best way to cut concrete, DCT, TSS, ProFORCE and TwinMAX are trademarks of ICS.1015


Polyester air filter designed specifically for wet cutting

Powerhead is lightweight, only 9.5kg.


Operates PowerGrit® 25cm (10 inch) bar and chain.

Multifunction lever controls choke, throttle advance, run and stop modes


Drive sprocket matched to PowerGrit chain.

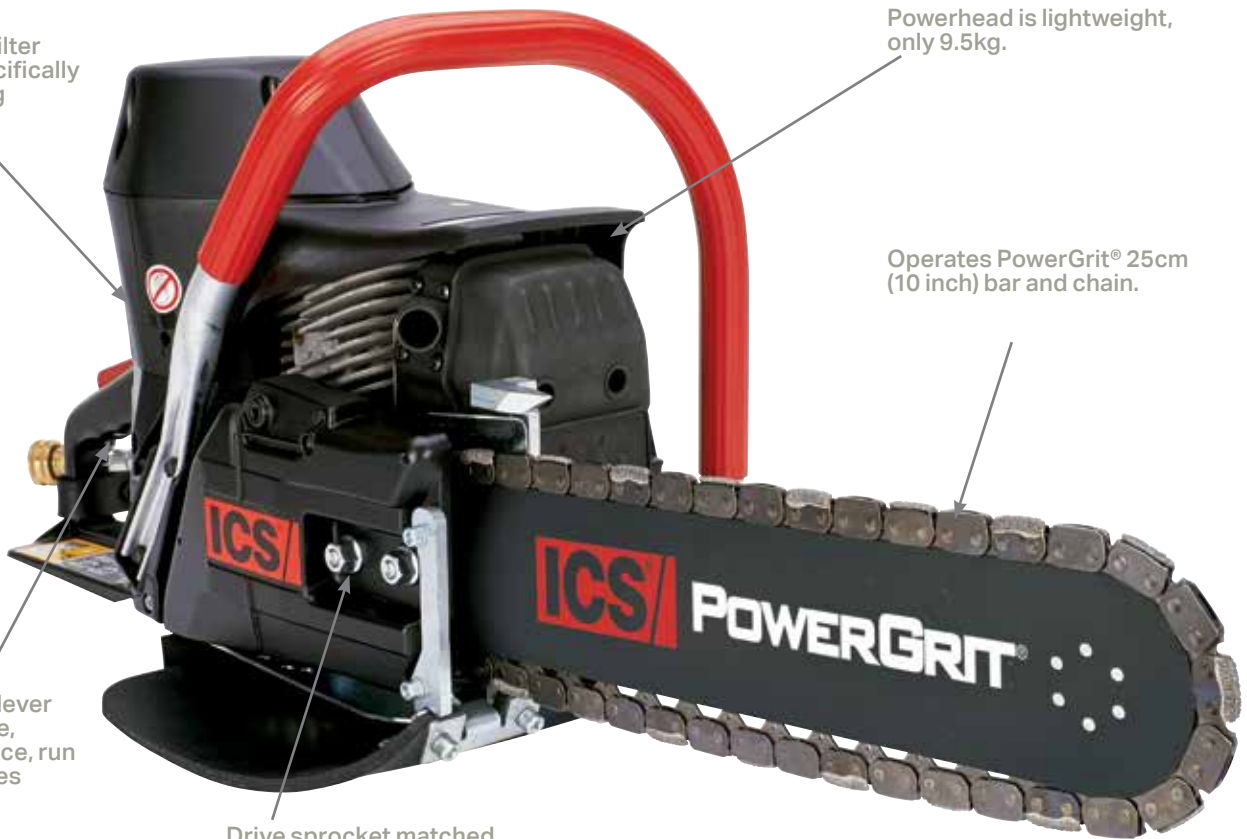

Cut up to a 25cm (10 inch) pipe from one side.



Easy tensioning of chain



Easy-to-start in all weather

ICS, BLOUNT S.A. | Rue Emile Francqui 5, 1435 Mont-Saint-Guibert, Belgium | T +32 10 301 251 · F +32 10 301 256

© Copyright 2015 ICS, Blount Inc. Privacy statement specifications subject to change without notice.

Pricing and specifications subject to change without notice. All rights reserved. ICS, WallWalker, SpeedHook, SealPRO, FORCE4 and PowerGrit are registered trademarks of ICS. The best way to cut concrete, DCT, TSS, ProFORCE and TwinMAX are trademarks of ICS.1015